

## Bundling Technik

### AXRO- FQC2 - AXRO- MD60 - AXRO- MH30 - Strapping machines

Tying machines provided with the well-known and proven AXRO gripping and knotting technology. Strapping machines are foreseen with reliable and robust strapping heads. From chives to trees and shrubs/young trees, for each Product a solution in our programme range.

### Nursery: Strapping machines



Strapping your plants or (young) trees so a gentle transport can be guaranteed.

Semi- or automatic-machines the strap tension can easily adjusted electronically.

Table machine is semi-automatic.

Arch machine is automatic. (variable arch sizes)

### MH 30




- Universal for Nurseries and other Industries
- Capacity by hand approx. 1,2 sec ( 50 / min)
- Housing and covers Stainless Steel
- Triggering the binding process:
- Table start switch or Foot pedal
- In Automatic systems by external potential free contact.
- Feed through height 300 mm
- Feed through length 600 mm
- Other length on request
- Machine width 400 mm
- Table height approx. 275 mm
- Machine depth: depending on version
- Power supply: 230V 50/60 Hz
- Weight depending on version approx. 80 Kg

#### Options:

- Mounting position on request
- Model: Right or Left version

# Axro- FQC2

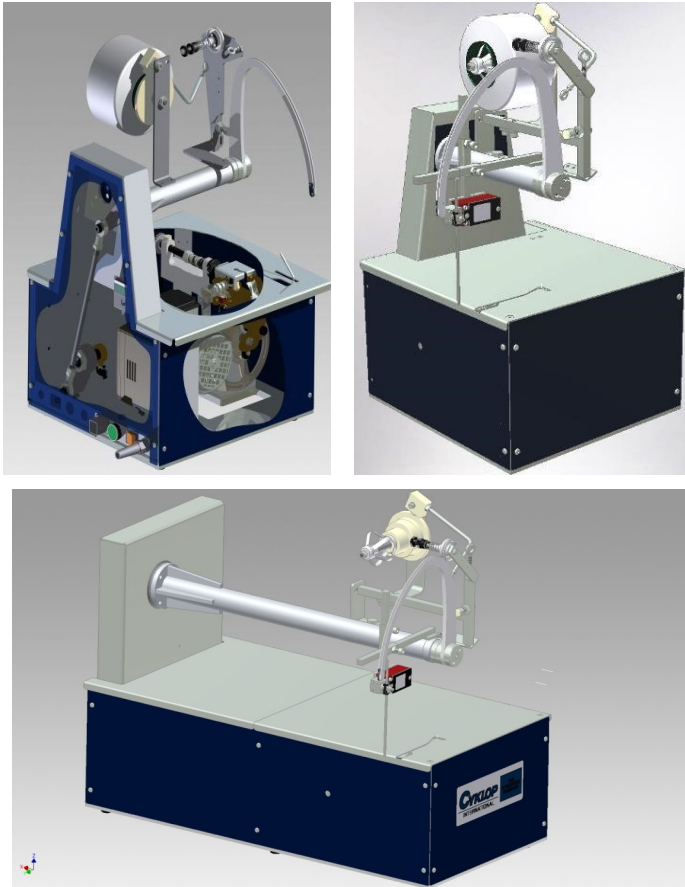

The Machines are built according to the European Safety Standards CE.  
Subject to Technical changes  
Stand 1.01.2017

## SroTec GmbH

bündeln etikettieren schneiden  
bundeling labeling cutting

### Properties:

- Universal for Nurseries and other Industries
- Cycle speed approx. 0,6 sec ( 100 / min)
- In Automatic systems up to 5000 Bunde/Hour
- Covers Stainless Steel
- Triggering the binding process:
- Table start switch or Foot pedal
- In Automatic systems by external potential free contact.
- Feed through height 150 mm
- Feed through length 250 mm
- Other length on request
- Machine width 400 mm
- Table height approx. 275 mm
- Machine depth: depending on version
- Power supply: 230V 50/60 Hz
- 24 V Optional
- Special Meat industry version
- Weight depending on version approx. 80 Kg

### Options:

- Mounting position on request
- Model: Right or Left version
- Softbox for tension less bundling
- Triggering by Photo cell
- 4-wheel support frame (Painted Steel or Stainless Steel)



### Elastic cord qualities:

- 3 Core yarn normal
- 2-3 or 4 core yarn UV-Stabile
- Special yarn for Foot industry
- Special yarn versions for use in air-conditioned rooms (Cool store)
- Special yarns for horticulture

## SroTec GmbH

AN DER PAPENBURG 49 D 44866 BOCHUM (GERMANY)  
TEL +49 (0) 2327 320714 Fax +49 (0) 2327 320715  
Web: [www.srotec.com](http://www.srotec.com) E-Mail [info@srotec.com](mailto:info@srotec.com)  
Youtube [srotec](https://www.youtube.com/srotec)